


-A- UNIT ATTIC VENTILATION CALCULATION

1. AREA:	972 SQ FT / 150' - 6.48 SQ FT
2. REQUIRED VENT AREA:	6.48 x 144 = 933 SQ INCHES
3. RIDGE VENTS PROVIDED:	17 LINEAL FT @ 10' FT = 306 SQ INCHES
4. SOFFIT VENTS PROVIDED:	38 LINEAL FT @ 17' FT = 342 SQ INCHES
5. LOW PROFILE ROOF VENTS:	(2) @ 14.5' x 14.5' = 430 SQ INCHES
6. TOTAL VENT AREA PROVIDED:	1,088 SQ INCHES SUPPLIED




1242 Mann Drive, Suite 200
Matthews North Carolina 28105
www.urbanarchitecturalgroup.com
P: 704.841.1899 F: 704.841.8440

These drawings are an instrument of service provided by Urban Architectural Group, PA.
© 2006 URBAN ARCHITECTURAL GROUP P.A.
All rights reserved. Unauthorized Reproduction Prohibited.

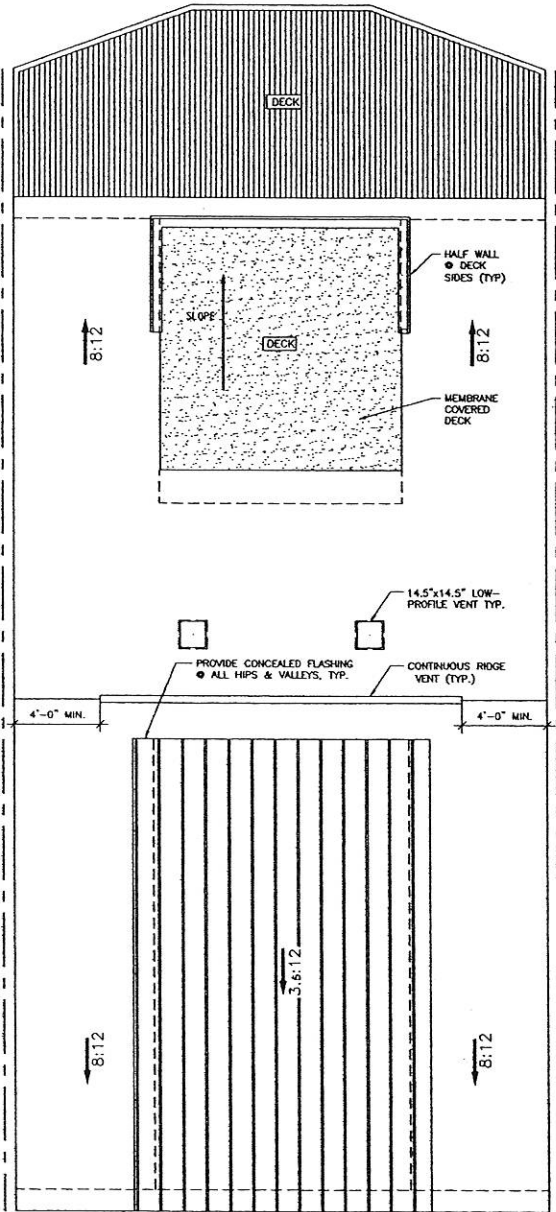

LAKE SHORE TOWN HOMES
TEGA CAY, SC



DATE DRAWN:	5 JUNE 2006
PROJECT NO.:	2530
ISSUED FOR:	PERMIT & CONSTRUCTION
DATE:	5 JUNE 2006

ROOF PLAN - @ UNIT -A-

A1c